



Temperature Range	5-35°C, 41-95°F	Temperature Override Limit	Y
WiFi Network Standard	802.11G	Output Delay	Y
Back Lit Display	Y	Frost Protection (7°C - 17°C)	Y
Ambient Light Sensor	Y	°C / °F Option	Y
Non-Programmable Mode	Y	Built In Air Sensor	Y
5/2 Day Programming Mode	Y	Remote Air Sensing Mode	Y
7 Day Programming Mode	Y	Floor Sensing Mode	Y
24 Hour Mode	Y	Remote Probe Included	N
Number of Heating Levels	4	Floor Temp Limit Protection	Y
Optimum Start	Y	Max Switching Current	3A
Number of Switching Times (Timer mode)	4	Accuracy +/-	.1°C
Holiday Function	Y	Adjustable Switching Differential	0.5 - 3.0
Keylock Function	Y	Supply	230VAC
Temperature Hold Function	Y	Installed Dimensions	95X95X15mm (W,H,D)
Temperature Override	Y	Weight	180g


Feature Table - Thermostat Mode

FEATURE	SETTING	FEATURE	SETTING
Pairing with App	Used to pair with the SmartStat App	Floor Temperature Limit	20°C - 45°C (28°C = Default)
WiFi Setup	Used to connect to the WiFi network	Optimum Start	00-05 hours (00 = Disabled as default)
Switching Differential	0.5° - 3.0°C (0.5°C = Default)	Rate of Change	Minutes to raise temperature by 1°C
Away Temperature	7° - 17°C (12°C = Default)	Program Mode	Weekday/Weekend (Default) 7 Day Programming 24 Hour Mode Non - Programmable
Output Delay	00 - 15 Minutes (00 = Default)	Temperature Format	00 = °C, 01 = °F (00 = Default)
Up/Down Temperature Limit	00° - 10°C (00 = Default)	Ambient Light Dimming	On / Off
Sensor Selection	Built in Sensor (Default) Remote Air Sensor Floor Sensor Only Built in & Floor Sensor Remote Air & Floor Sensor		

Feature Table - Timer Mode

FEATURE	SETTING	FEATURE	SETTING
Pairing with App	Used to add pair with the SmartStat App	Program Mode	Weekday/Weekend (Default) 7 Day Programming 24 Hour Mode Non - Programmable
WiFi Setup	Used to connect to the WiFi network	Ambient Light Dimming	On / Off

Product Dimensions (mm) & Wiring Specification

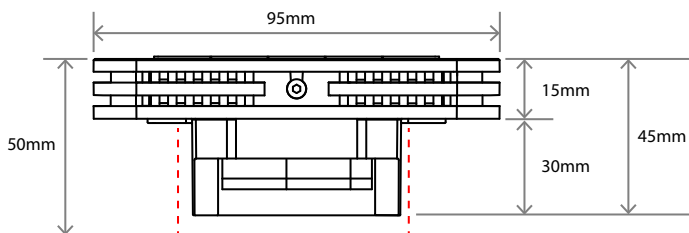

Note: Fits standard 35mm depth back box

